

Errata

SLG47004

CE-GP-005

Abstract

This document contains the known errata for SLG47004 and the recommended workarounds.

SLG47004 Errata

1 Information

Package(s)	24-pin STQFN: 3 mm x 3 mm x 0.55 mm, 0.4 mm pitch
-------------------	---

2 Errata Summary

Table 1: Errata Summary

Issue #	Issue Title
1	Slew Rate & Inrush Current Behavior of the Analog V_{DD}'s ESD Structure

3 Errata Details

3.1 Slew Rate & Inrush Current Behavior of the Analog V_{DD}'s ESD Structure

3.1.1 Effect

Chip Current Consumption

Chip Reliability

3.1.2 Conditions

When powering ON the Analog V_{DD} with a slew rate exceeding 1 V/μs, a large inrush current exceeding 190 mA flows through the analog circuitry's ESD power clamp structure. With faster slew rates (2 V/μs), the inrush current through V_{DDA} can reach 890 mA.

3.1.3 Technical Description

For larger slew rates and higher temperatures, this behavior can permanently damage the SLG47004 by creating a low impedance path between the power supply rails. This damage is caused by bipolar snapback within the ESD protection device. For this reason, Dialog has introduced an Abs. Max. parameter in the SLG47004's base die datasheet specifying a maximum slew rate of 2 V/μs on V_{DDA}.

SLG47004 Errata

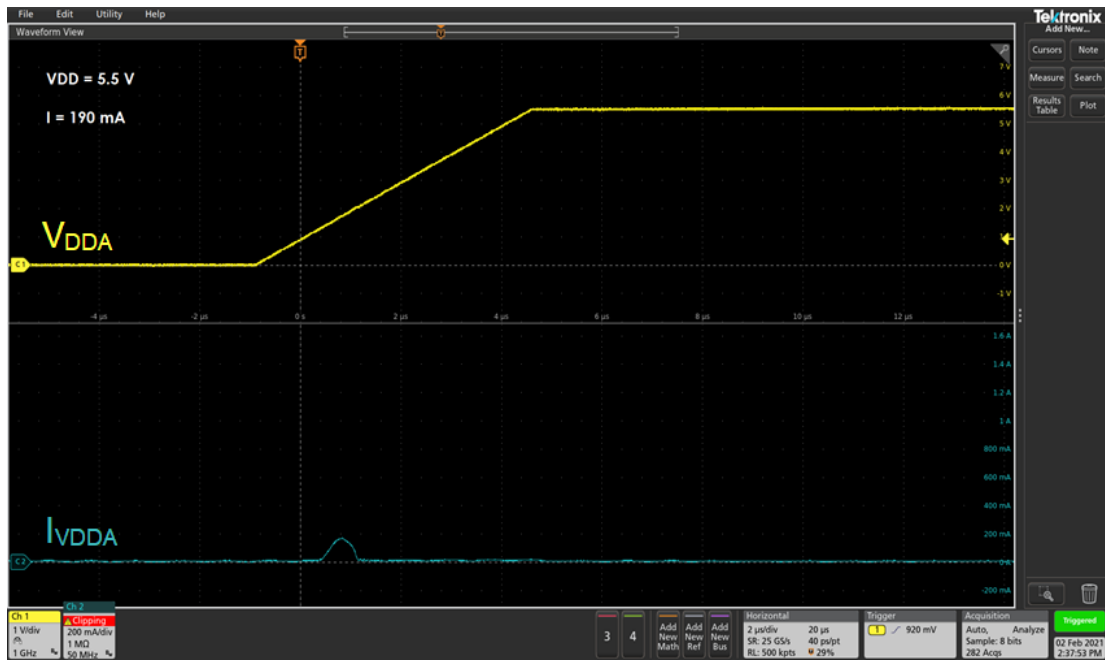


Figure 1: Inrush Current at V_{DDA} Slew Rate = 1 V/ μs

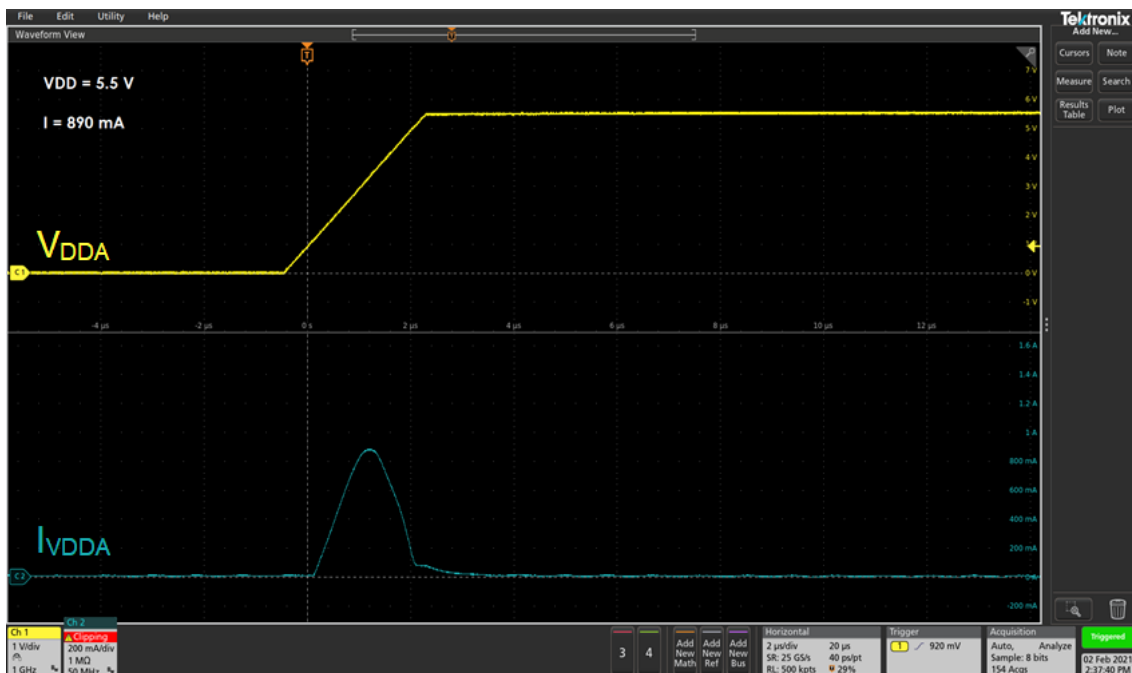


Figure 2: Inrush Current at V_{DDA} Slew Rate = 2 V/ μs

In addition to damaging the SLG47004, this inrush current introduces two other concerns. When powering ON the device, the customer will see increased power consumption within their system, which can be critical for some low power applications. This behavior also introduces the risk of power supply brownout if the power source (LDO, battery, capacitor, and others) is too weak to source the inrush current drawn by the SLG47004. If ignored, these brownout issues can cause faults to occur in other ICs throughout the system.

SLG47004 Errata

3.1.4 Workaround

To avoid this behavior, we recommend limiting the Analog V_{DD} 's slew rate to a value lower than $2 \text{ V}/\mu\text{s}$, as this will protect the SLG47004 while limiting inrush current. This can be done by many methods including the use of slew rate limited analog switches or DC/DC converters. Alternatively, you could increase the capacitance on the SLG47004's Analog V_{DD} line and place a series resistance on the output of the power supply. Note that this resistor will introduce additional power loss to the system and will cause voltage noise on the analog power rail.

Document Revision History

Revision	Date	Description
1.1	12-Feb-2021	Corrected Slew Rate and Inrush Current values
1.0	9-Nov-2020	Initial version

SLG47004 Errata

Status Definitions

Status	Definition
DRAFT	The content of this document is under review and subject to formal approval, which may result in modifications or additions.
APPROVED or unmarked	The content of this document has been approved for publication.

Disclaimer

Unless otherwise agreed in writing, the Dialog Semiconductor products (and any associated software) referred to in this document are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Dialog Semiconductor product (or associated software) can reasonably be expected to result in personal injury, death or severe property or environmental damage. Dialog Semiconductor and its suppliers accept no liability for inclusion and/or use of Dialog Semiconductor products (and any associated software) in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Information in this document is believed to be accurate and reliable. However, Dialog Semiconductor does not give any representations or warranties, express or implied, as to the accuracy or completeness of such information. Dialog Semiconductor furthermore takes no responsibility whatsoever for the content in this document if provided by any information source outside of Dialog Semiconductor.

Dialog Semiconductor reserves the right to change without notice the information published in this document, including, without limitation, the specification and the design of the related semiconductor products, software and applications. Notwithstanding the foregoing, for any automotive grade version of the device, Dialog Semiconductor reserves the right to change the information published in this document, including, without limitation, the specification and the design of the related semiconductor products, software and applications, in accordance with its standard automotive change notification process.

Applications, software, and semiconductor products described in this document are for illustrative purposes only. Dialog Semiconductor makes no representation or warranty that such applications, software and semiconductor products will be suitable for the specified use without further testing or modification. Unless otherwise agreed in writing, such testing or modification is the sole responsibility of the customer and Dialog Semiconductor excludes all liability in this respect.

Nothing in this document may be construed as a license for customer to use the Dialog Semiconductor products, software and applications referred to in this document. Such license must be separately sought by customer with Dialog Semiconductor.

All use of Dialog Semiconductor products, software and applications referred to in this document is subject to Dialog Semiconductor's [Standard Terms and Conditions of Sale](http://www.dialog-semiconductor.com), available on the company website (www.dialog-semiconductor.com) unless otherwise stated.

Dialog, Dialog Semiconductor and the Dialog logo are trademarks of Dialog Semiconductor Plc or its subsidiaries. All other product or service names and marks are the property of their respective owners.

© 2021 Dialog Semiconductor. All rights reserved.

Contacting Dialog Semiconductor

United Kingdom (Headquarters)

Dialog Semiconductor (UK) LTD
Phone: +44 1793 757700

Germany

Dialog Semiconductor GmbH
Phone: +49 7021 805-0

The Netherlands

Dialog Semiconductor B.V.
Phone: +31 73 640 8822

Email:

enquiry@diasemi.com

North America

Dialog Semiconductor Inc.
Phone: +1 408 845 8500

Japan

Dialog Semiconductor K. K.
Phone: +81 3 5769 5100

Taiwan

Dialog Semiconductor Taiwan
Phone: +886 281 786 222

Web site:

www.dialog-semiconductor.com

Hong Kong

Dialog Semiconductor Hong Kong
Phone: +852 2607 4271

Korea

Dialog Semiconductor Korea
Phone: +82 2 3469 8200

China (Shenzhen)

Dialog Semiconductor China
Phone: +86 755 2981 3669

China (Shanghai)

Dialog Semiconductor China
Phone: +86 21 5424 9058